
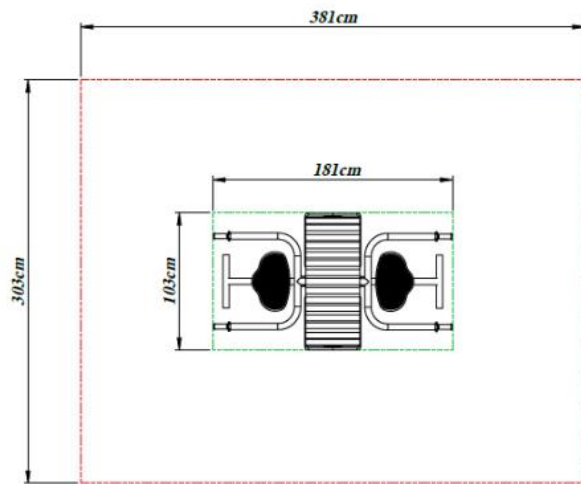
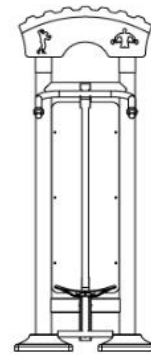


PB-05 Body Building tool with Nameplate

- The Bilbord bodybuilding tool consists of two stations that can be used by one or two people.
- It is designed for use to growth and stretch the leg muscles.
- Carrier pipes are manufactured from pipes with a diameter of at least Ø 114 mm and a wall thickness of 2.5-3 mm.
- Ø114 SDM pipes will be used at 4 points where the apparatus to be used in the connection of the main carriers and the assembly of the panel will be welded.
- Digital printing is made on 2 mm thick dkp sheet material on the panel, which will be mounted on a minimum 4 mm apparatus on the main carrier.
- The moving parts connected to the main body are manufactured with a wall thickness of at least Ø 60 mm and 2.5-3 mm and in one piece with a special twist.
- The main body flashes are manufactured by laser cutting from ST37 sheet with a thickness of 8 mm and a size of 280x280 mm and 4 pieces of flag sheet are welded in order to increase the flange strength.
- Anchor covers measuring Ø114 mm in accordance with the design to fully grasp the carrier pipes are used to close the open-ended pipes in fitness products.
- Anchor covers are produced from polyethylene plastic material by LLDPE (Linear Low Density Polyethylene) injection method.
- It is designed to be resistant to UV lights and not to harm the user.
- It is manufactured as a double wall and its installation is provided with a screwing system.
- The pipes that provide adhesion are designed with special twisted pipes of Ø 32 mm.
- The seats are mounted on Ø 60 mm pipes.
- It is produced in a way that allows it to be used in seating areas.
- The seat is manufactured from polyethylene plastic material by LLDPE (Linear Low Density Polyethylene) injection method.
- The foot and hand holding places are made of special twisted pipes of Ø 60.
- The handpieces are manufactured by LLDPE (Linear Low Density Polyethylene) injection method from polyethylene plastic material in such a way that they can be held by hand and fit tightly to the pipe.
- Fitness roof is produced from polyethylene plastic material by rotation method.
- The upper part is designed serrated to prevent rain, snow, etc. from puddles of water.

- It is mounted to the main body with protrusions located at the base.
- There are no sharp edges and corners that will harm the user.

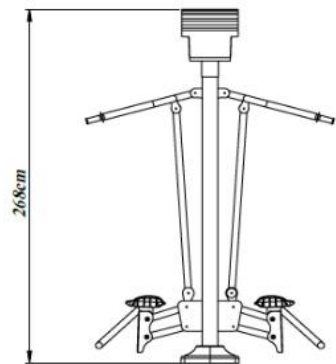

Dimensions	Width	103 cm
	Length	181 cm
	Height	268 cm